

NINZ S.p.A. - corso Trento, 2/A I-38061 ALA (TN) / ITALY www.ninz.it Tel. + 39 0 464 678300 Fax. +39 0 464 679025 info@ninz.it

KIT EXUS LX A

PANIC EXIT DEVICE for emergency exits

A101-GB 5001181/1 - 02/19

	Commercial codes 4204302.008 KIT EXUS LX A for UNIVER doors - fire-rated		DoP no.	1125-TW-EX-01
			Website	https://www.ninz.it/it/download/dop
			Classification	3 7 7 B 1 3 2 1 A A
E	Name and address of the producer	NINZ S.p.A corso Trento 2/A I-38061 ALA (TN) - ITALIA	Classification nr. 1 st Character - grade 3 - Category of use: high frequency 2 nd Character - grade 7 - Durability: 200.000 cycles	
	Year application trademark	2007	3 rd Character - grade 7 - Mass of the door: over 200kg 4 th Character - grade B - Suitable for use on fire/smoke rated doors 5 th Character - grade 1 - Safety: suitable for emergency exits 6 th Character - grade 3 - Highly resistant to corrosion 96h 7 th Character - grade 2 - Safety of goods: 1000N 8 th Character - grade 1 - Protrusion of the exit bar: up to 150mm 9 th Character - grade A - Activation type: push bar 10 th Character - grade A - Suitable for 1 or 2 leaved door	- Mass of the door: over 200kg - Suitable for use on fire/smoke rated doors
	Standard	EN 1125:2008 + EC1:2009		- Highly resistant to corrosion 96h - Safety of goods: 1000N
	Certification authority no.	0425		- Activation type: push bar
	CE certification no.	0425-CPR-001228	doors up to 1350x2880n	one leaf or for the active leaf (primary) of two-leaved nm/leaf in size, a mass of up to 300kg/leaf, mounted resistant up to $El^2120 - REI120$ and smoke proof. : 125mm.

SYMBOLS EMPLOYED



CAUTION



Indicates a danger that threatens people and/or material goods. Failure to observe the warnings indicated by this symbol may have serious consequences, such as personal injury and property damage. ATTENTION

Indicates a danger that threatens material goods. Failure to observe the warnings indicated by this symbol may result in damage to material goods.

Warnings related to important technical aspects.

PRODUCT DESCRIPTION

NOTICE

Panic bar for one-leaved doors or for the active leaf of two-leaved doors located at emergency exits and activated by push-bars. Composed of galvanized steel controls, black plastic casing and lever, horizontal aluminium bar, external lever handle, panic lock and nickel-plated brass cylinder with three keys.

This product does not contain or release any hazardous materials, as per UNI EN standard nr. 1125 appendix ZA.

OPERATION MODE

While locked by key, the door cannot be opened from the pull side (handle side), while it can always be opened from the push side by using the horizontal bar of the EXUS LP BM panic exit device.

WARNINGS

The EXUS panic bar activated by means of a horizontal bar is intended for use onto doors installed in escape routes where panic situations could develop. The safety features of this product are of fundamental importance to ensure its conformity with EN 1125. It is strictly forbidden to introduce any type of modifications apart from those described in these installation instructions.

RECOMMENDATIONS

In order to ensure that the panic bar could provide a high level of safety toward people and appropriate safety level toward goods, it should only be mounted onto doors and doorframes that are in good conditions. The door itself, therefore, should be checked to ensure that it was installed properly and that nothing obstructs its normal movement.

If door rebate sealing have been mounted on the door, make sure they do not inhibit proper functioning of the panic bar.



In case of two-leaved door where both leaves are equipped with panic bar, it is mandatory to check that each leaf opens when its respective panic bar is activated, and that leaves open freely when the bars are activated simultaneously.

The fastening instructions in the present document should be followed scrupulously during installation. Once installation is complete, the installer should give this document to the owner of the activity.

The horizontal bar should be installed in a way that maximizes its useable lenath.

For securing the door in the closed position, do not employ any other latching devices than those specified in the present document. This does not preclude the installation of automatic closing devices.


Different external access devices than those found on the list of certified components on pages 4/4 are considered unacceptable.

The EXUS panic bar is also designed for installation on hollow metal doors with an internal cell structure.

If a door closer is needed to return the door to the closed position, care should be taken not to make the opening step more difficult for children, the elderly and the disabled.

A pictogram (arrow) should be positioned immediately above the horizontal bar on the internal side of the door.


All of the included components described herein must be positioned and mounted in conformity with the present document.

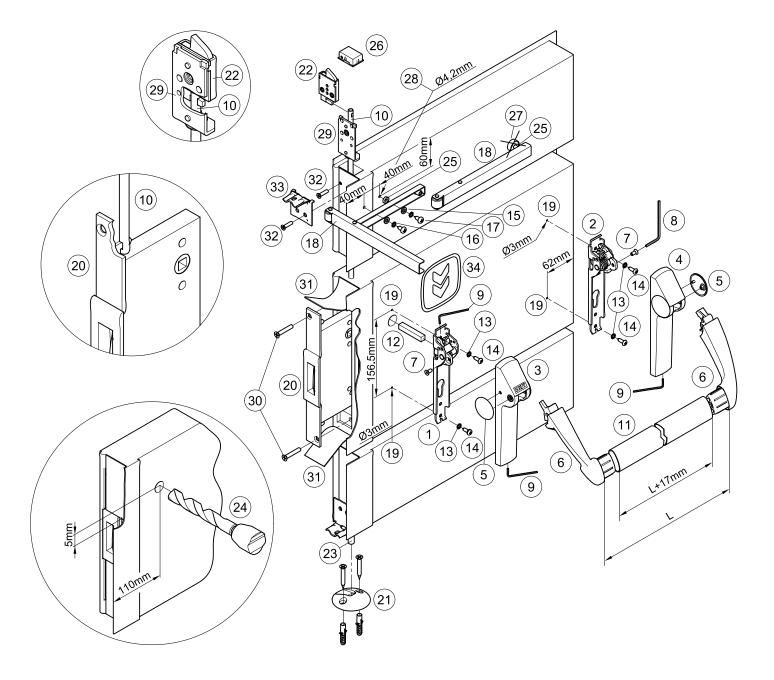

CONTENTS OF THE EXUS LX A PANIC BAR PACKAGE

position	pcs.	description	position	pcs.	description
1, 2	01	Exus LX mechanism assembly in stainless steel	16	02	Toothed washer
3, 4, 5	01	Exus LX carter set with plugs	17	02	Pan head self tapping screw Ø5,5x13mm
6	01	Exus LX set carrier arms	18, 25, 27	01	Carrier arm
7	02	M5x10mm hex socket countersunk screw	20	01	Panic safe lock for passive leaf
8	01	S3 hex key	21	01	Univer floor catch with 2 plastic anchors
9	01	S2 hex key	22, 32	01	Upper bolt-device with screw
11	01	Horizontal bar in stainless steel	34	01	Adhesive pictogram (green arrow)
12	01	Square spindle 9x9x52mm	-	01	A034 hole-drilling template
13	04	Toothed washer	-	01	Exus LX A fire-rated Univer panic bar installation
14	04	Pan head self tapping screw Ø4,8x16mm			instructions
15	02	Washer			

N.B. before mounting the panic exit device the leaf has to be prepared following the installation instructions.



Please note that article 4 of the MD of 03 November 2004 obliges the installer to write up, sign and provide the owner of the activity with a declaration of proper installation that makes explicit reference to the instructions supplied by the exit device manufacturer.

TOOLS REQUIRED

Medium-sized Philips-head screwdriver or electric screwdriver, electric drill with Ø3, Ø4,2 and Ø20mm drill bit for steel, hack-saw for stainless steel.

IMPORTANT

- Installation should be carried out by qualified personnel only and in strict conformity with the instructions supplied.
- For a correct installation all supplied components must be used, including toothed washers.
- No variations are allowed, and only components indicated in the package contents may be used.
- Given its purpose, the Exus LX A panic bar should be mounted on the pushside of the inactive leaf and the active leaf has to be fitted with an Exus LX panic exit device, too.
- Before proceeding with installation, check the package contents to ensure that no pieces are missing.
- Any different installation configuration from that illustrated on pag. 2/4 is not allowed.
- If the door is not yet installed and to avoid any other adaptation operations, it is recommended to define the opening direction at every beginning so that changing operations of the opening direction listed in the installation instructions of the door itself can be executed at the same time. As standard the door is prepared for right hand opening to pull.

INSTALLATION

- To make the work easier, it is best (though not required) to lay the passive (secondary) leaf horizontally across two work benches.
- First disassemble any handles or bar components that are already present.
- Remove the existing panic safe lock (20) by unscrewing the two frontal screws (30) after first detaching the thermo-expanding gasket (31) that is glued over them
- Remove the present upper bolt-device (22) by unscrewing the two frontal screws (32) and by removing, if present, the frame-connecting bracket (33). The upper bolt-device must be unthread from the central joint dragging with it also the corner steel of the rod (29) and the upper vertical rod (10).
- Install the new upper bolt-device (22) included in the supplied KIT, bring the rod (10), the corner steel of the rod (29) and the device (22) in the right position and re-fasten all with the two M5x20mm screws (32).



- Install the new panic safe lock (20), making sure to center the square hole of both rods. The operation should be carried out with great care, making sure not to ruin or displace any of the components inside the lock housing. Attention: the hole for the square spindle on the lock mechanism should be turned towards the upper part of the door. Reuse the two M6x35mm screws (30) for the fastening of the panic safe lock. Ensure that the two rods are attached and can move freely.

- Re-glue the thermo expanding gasket (31), if necessary by using a common silicone and refit the leaf correctly on the frame.
- If not already installed, apply the floor catch (21) by attaching it with the appropriate screws and fasteners according to the door installation instructions.
- Continue with installing the panic exit device and if no hole should have been provided for the passage of the square spindle (12), drill the hole in the metal panel at the push-side of the door at the position indicated in figure (24) by using the Ø20mm drill bit.
- Use the template to drill the holes (19) with the Ø3mm drill bit, checking the level. Drill the holes in each case also in the internal reinforcement.



- Insert the square spindle (12) in the operating mechanism (1) until it touches the spring, then fasten it with the threaded pin by using the S2 hex key (9).
- Center the square spindle (12) correctly into the hole of the lock (20) while approaching the mechanism (1) until it touches the metal panel of the leaf, fasten it by tightening the Ø4,8x16mm self-tapping screws (14) and their toothed washers (13).
- Fasten the mechanism (2) of the panic bar at hinged side, using the selftapping screws Ø4,8x16mm (14) and their toothed washers (13).
- Remove the externally-facing plugs (5) from both carter (3 and 4). To do this, insert a finger inside the carter and push the plug out, being careful not to remove the plastic insert. Apply the carter with "EXIT" wording (3) on the operating mechanism (1) and the other one (4) on the mechanism from hinged side (2). Do not fasten the socked set screws, so as to let the two carter movable.
- Apply the carrier arms (6) and fasten them with the dedicated screws (7), tightening them securely with the included S3 wrench (8).
- Make a precise "L" measurement, cut the stainless steel bar (11) adding 17mm, and remove the burrs from the cut edge. Remove one carrier arm, attach the bar and re-fasten the entire assembly.
- Finish fastening of the two carter (3 and 4), screw on without overtighten the socked set screw, using the S2 hex key (9), then apply the plugs (5).

- Drill the two holes (28) with the Ø4,2mm drill bit at a distance of 60mm from the upper edge of the leaf and 40mm apart from each other. The first hole has to be drilled 40 mm away from the lateral edge of the central joint.
- Unscrew the rubber spacer (27) and recover the nut (25) which will be used as spacer at the third slot for fastening of the carrier arm.
- Apply the carrier arm (18) as shown in the drawing, fastening it with the two 5,5x13mm self-tapping screws (17) and their washers (15 and 16).
- Adjust the position of the carrier arm so that using the horizontal bar of the passive leaf causes that the active leaf is pushed just enough to ensure the correct closing sequence for the two leaves (active leaf held in waiting position by the closing regulator).



- Push the Exus LX A panic bar at any point along the horizontal bar to check the complete exit of the counter-latchbolt and the full retraction of the upper bolt-device (22) as well as the lower rod (23). Test the door in both open and closed positions. In case of fire-rated doors verify that the self-closing sequence of the two leaves operates properly.

- Apply the pictogram (34) with the green arrow on the internal surface of the door, just above the horizontal bar.
- Lastly, use a dynamometer to measure the force required on the horizontal bar of the Exus LX A panic exit device to free the passive leaf from the latch bolt of the lock, from the upper bolt-device and from the lower rod. Record this force measurement in the present document.

USE

- Ensure that the leaf always opens easily.
- Avoid unnecessary strains on or handling of the exit bar.
- Protect the panic bar from external atmospheric agents.
- Avoid anything that could hamper the free movement of the bar.
- Do not paint the panic safe lock of the passive leaf, neither the upper boltdevice, neither the tip of the lower rod and its respective guide.
- Use the bar properly, do not pull it in the wrong direction.

- Make sure that any damaged or malfunctioning parts are replaced immediately.


MAINTENANCE

To ensure that door usage conforms with regulations, the following maintenance checks should be carried out at least once a month:


- Confirm that all of the installed components correspond with those listed in the present instructions and that no other latching devices than those originally installed have been added to the door.
- Inspect and activate the panic bar to verify that all of its components are in satisfactory operational condition.
- Use a dynamometer to confirm that the release force shows no significant differences from the forces recorded at the time of installation.

- Check whether all screws are fully tightened, tightening any that may have loosened.

- Push the panic bar at any point along the horizontal bar to check the complete exit of the counter-latchbolt and the full retraction of the upper bolt-device (22) as well as the lower rod (23). Test the door in both open and closed positions.
- Once released the horizontal bar and closed the leaf, verify that the counterlachtbolt retracts fully as well as the upper bolt-device and lower rod exit completely.
- Open the two leaves by acting on the exit bar of the secondary leaf and verify the correct closing sequence of the two doors.
- Check the horizontal bar and replace it if any damage or deformities are detected.



- The product requires no special maintenance. Grease spray should be used to lubricate the upper bolt-device, the lower rod guide, internal workings of the lock and panic bar on a regular basis - the latter has a hole on its carter for this purpose, located below the carrier arms.
- For normal cleaning, use a cleaning agent designed specifically for stainless steel.



The owner of the activity is responsible for keeping the declaration of correct installation on file, conducting proper exit bar maintenance in accordance with all of the manufacturer's maintenance guidelines, keeping maintenance and check-up records and preserving the present document.

<u>0425</u>		
	ICINA	
	ICIIVI	
	ICIM S.p.A Identification number: 0425 Piazza Don Enrico Mapelli, 75 - 20099 Sesto San Giovanni (MI) - ITALY	
	Certificato di costanza delle prestazioni Certificate of constancy of performance	
	Certificato N. Certificate No. 0425 - CPR - 001228	
	In conformità al Regulamento 505/011/EEI del Planamento Europee e da Consiglio del Tamaro 2011. Il Regulamento Prodotti da Constatoreo e 1078), questo rentativo e tapolica al produce da constanza. In compliance with Regulation 335/2011/EEI del Reuropean Praistement and cel fano Council of Manch 2011 (Bri Coustruction Producta: Cartificatori or CPR), il na celtaratta agellas de la constancia presenta del constanza.	
	Dispositivi per le uscite antipanico azionati mediante una barra orizzontale per l'utilizzo sulle vie di esodo Panice ati devices operated by a horizontal bar, for use on escape routes	
	SERIE / SERIES TWIST, EXUS LP, EXUS LA, EXUS LX MODELLI/MODELS Si veda allegato / See annex	
	Caratteristiche: vedi Allegato / Characteristics: see Annex	
	IMMESSO SUL MERCATO CON IL NOME O IL MARCHIO DI PLACED ON THE MARKET UNDER THE NAME OR TRADE MARK OF	
	NINZ S.p.A.	
	SEDE LEGALE HEAD OFFICE Corso Trento, 2/A - 38061 ALA (TN) - ITALY	
	UNITÀ OPERATIVA PRODUCTION UNIT Corso Trento, 2/A - 38061 ALA (TN) - ITALY	
	Questo confliction attests due tutte la dispositioni riguardanti la valutazione e la verifica della costanza della prestaziori descritto rell'algua 20 della coma: prestaziori descritto rell'algua 20 della coma: This coefficiete attests that al provisions concerning the assessment and verification of constancy of performance and the performances described el Aneza 24 de ba standard	
	performances seschede in Annex 2A or ne standard nell'ambito del sistema 1 di cui al presente certificato vengeno applicati e che il controllo di produzione in fabbrica condotto dal	
	ner analytic der solenia i fund an preterne certricate vergene approar en a control o in produzione in technica condotto dal produttore versitation allen dignamente la under system 1 set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the	
	COSTANZA DELLA PRESTAZIONE DEL PRODOTTO DA COSTRUZIONE CONSTANCY OF PERFORMANCE OF THE CONSTRUCTION PRODUCT	
	Questo certificato à stato entesso per la prima volta il 1404/2007 e ha validàti asio a due la norma amovizanta, il prodoto da construcción, interde AICVP le condición periodizacione notalicatente non subiscuno modificione significativo, sino a due non vegas aposeso osititato dall'organizativo di continuación periodicaso L2M Sg. A. This certificate vere finita dadi "organizativo" dal veri mania vela las loga antehet he hamociante attandes, file construction product, file AIVCP e interdistori da dal veri dava vela las logas antehet he hamociante attandes. El tecustruction product, file AIVCP entrolosi nor he manifectarios; constitosis in he plant are modified significantly, unless auspended or withdrawn by the notifier portaci relativo had y G/L2M Sg. A.	
	Il presente Certificato è da ritenersi valido solo se accompagnato dal relativo Allegato / Tris Certificate is valid only with the relative Annex.	
	V Dio.	
	ICIM S.p.A.	
	Direttore Tecnico	
	EMISSIONE /SSUE	
	18/04/2017	
5	ICIM S.p.A. • Piazza Don Enrico Mapelli, 75 • 20099 Sesto San Giovanni (MI)	

serie "EXUS LX"

art. AP 020P

art. 3105024

art. 2401044

art. 2401007

art. A

art. 3305015, 3305002

Certified components for EXUS LX A

Panic safe lock inactive leaf:

Upper bolt-device:

Strike box (upper rod):

Panic exit device:

Floor catch:

Vertical rods:

External control:

position	code	description			
1, 2, 3, 4, 5, 6, 7, 8, 34	3102061.001	Exus LX latch case – stainless steel			
1, 2	3105127.001	Exus LX assembly mechanism – stainless steel			
3, 4, 5	3105163.001	Exus LX carter set with plugs			
6	3105140.001	Exus LX set carrier arm			
7, 8	3105026.001	Twist/Exus bag			
11	4204016.001	Stainless steel bar set			
9, 12, 13, 14, 21	4211101.042	Twist/Exus A set Univer			
20	3201001.024	Panic safe lock for inactive leaf of			
		Proget and Univer fire-rated doors – AP020P			
22, 32	3105024.001	Upper bolt-device with screws – inactive leaf Rever and Univer			
10	3305015.001	Upper rod (indicate the wall opening height FMH / WOH) – Proget, Univer and Rever			
23	3305002.001	Lower rod (indicate wall opening height FMH / WOH) – Univer and Rever			
26	4212028.001	Set of 10 plastic strike box with roller – Rever and Univer			
15, 16, 17, 18, 25, 27	3305001.001	Carrier arm box LC			
29	4212029.001	Set of 5 rod-guide corner zone for double leaf door			

SPARE PARTS (see exploded drawing at page. 2/4)



FOR REPLACEMENTS USE ORIGINAL NINZ REPLACEMENT PARTS FROM ITS FULL CERTIFIED SYSTEM ONLY!

PROPER DISASSEMBLY

When some components or the entire panic exit device need to be replaced, the general approach is to reverse the order of the original installation instructions. Replacement of the panic safe lock first requires that all parts of the panic bar in the lock zone be disassembled. To remove the panic safe lock (20) unscrew the two frontal screws; for fire-rated doors, first detach the thermo-expanding gasket that is glued over the fastening screws.



The operation should be carried out with great care, being sure not to ruin or displace any of the components inside the lock housing and reattaching the rods with great care!

MAINTENANCE RECORD					
date	description of the intervention	release force checked	operator		

These instructions should be given to the owner of the activity, who must preserve them as a record of the maintenance operations carried out on the panic bar.

C a