

NINZ S.p.A. - corso Trento, 2/A I-38061 ALA (TN) / ITALY www.ninz.it Tel. + 39 0 464 678300 Fax. +39 0 464 679025 info@ninz.it

SLASH ALU BS

PANIC EXIT DEVICE for emergency exits

A221-GB

5001318/2 - 07/17

	Commercial codes SLASH ALU BS Prog (without hole cover pl SLASH ALU BS		item 4201101.152 item 4201101.151	DoP no. Website Classification	1125-SL-01 https://www.ninz.it/it/download/dop 3 7 7 B 1 3 2 2 B A	
€	Name and address of the producer		- corso Trento 2/A (TN) - ITALY	2 nd Character - grade 7 - Di 3 rd Character - grade 7 - M	Category of use: high frequency Durability: 200.000 cycles Mass of the door: over 200kg Suitable for use on fire/smoke rated doors	
	Year application trademark	2007		5 th Character - grade 1 - Sa 6 th Character - grade 3 - Hi 7 th Character - grade 2 - Sa	afety: suitable for emergency exits ighly resistant to corrosion 96h afety of goods: 1000N rotrusion of the device: up to 100mm	
	Standard	EN 1125:20	08 + EC1:2009	9th Character - grade B - Ad		
	Certification authority nr.	0425		doors up to 1350x2880mm/l	af or for the active (first opening) leaf of two-leaved leaf in size, a mass of up to 300kg/leaf, mounted	
	CE certification number	0425-CPR-0	001308	on hinges or pivots, fire rea Protrusion of the exit bar: 75	sistant up to EI_2 120 - REI120 and smoke proof. mm.	

SYMBOLS EMPLOYED



CAUTION

Indicates a danger that threatens people and/or material goods. Failure to observe the warnings indicated by this symbol may have serious consequences, such as personal injury and property damage.



ATTENTION

Indicates a danger that threatens material goods. Failure to observe the warnings indicated by this symbol may result in damage to material goods.

⇒ NOTICE

Warnings related to important technical aspects.

PRODUCT DESCRIPTION

Panic bar for one-leaved doors or for the active leaf of two-leaved doors located at emergency exits and activated by touch-bar. Composed of galvanized steel controls, chrome-polished aluminium carter, horizontal aluminium bar, stainless steel external plate with galvanized steel installation plate and nickel-plated brass cylinder with three keys.

This product does not contain or release any hazardous materials, as per UNI EN standard no. 1125 appendix ZA.

OPERATION MODE

From the pull side (external plate side), the door can only be opened by key, which retracts the latch bolt, whereas opening is possible from the push side at any time by pushing on the horizontal bar of the SLASH ALU BS panic bar.

WARNINGS

The SLASH panic bar activated by means of a horizontal bar is intended for use onto doors installed in escape routes where panic situations could develop. The safety features of this product are of fundamental importance to ensure its conformity with EN 1125. It is strictly forbidden to introduce any type of modifications apart from those described in these installation instructions.

In order to ensure that the panic bar could provide a high level of safety toward people and appropriate safety level toward goods, it should only be mounted onto doors and doorframes that are in good conditions. The door itself, therefore, should be checked to ensure that it was installed properly and that nothing obstructs its normal movement.

If rebate sealing are mounted on the door, make sure they do not inhibit proper functioning of the panic bar.



RECOMMENDATIONS

In case of two-leaved door where both leaves are equipped with panic bar, it is mandatory to check that each leaf opens when its respective panic bar is activated, and that leaves open freely when the bars are activated simultaneously.

The fastening instructions in the present document should be followed scrupulously during installation. Once installation is complete, the installer should give this document to the owner of the activity.

The horizontal bar should be installed in a way that maximizes its useable length.

For securing the door in the closed position, do not employ any other latching devices than those specified in the present document. This does not preclude the installation of automatic closing devices.

Different external access devices than those found on the list of certified components on pages 4/4 are considered unacceptable.


The SLASH panic bar is also designed for installation on hollow metal doors with an internal cell structure.

If a door closer is needed to return the door to the closed position, care should be taken not to make the opening step more difficult for children, the elderly and the disabled.

A pictogram (arrow) should be positioned immediately above the horizontal bar on the internal side of the door.



All of the included components described herein must be positioned and mounted in conformity with the present document.

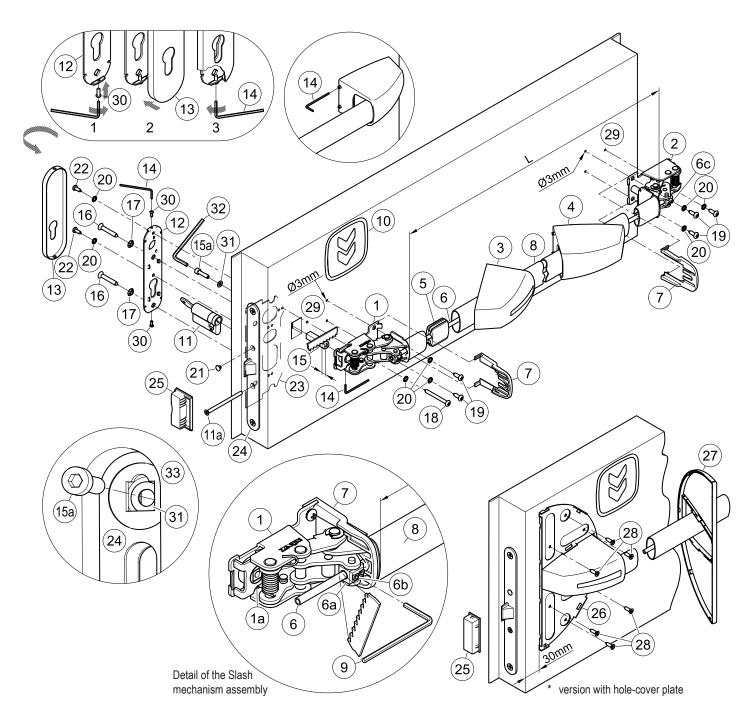

CONTENTS OF THE SLASH ALU BS PANIC BAR PACKAGE

position	pcs.	description	pos	sition	pcs.	description
1, 2	01	Slash mechanism assembly		18	01	Pan head self-tapping screw, Ø4,8x50mm (Proget+Univer)
3, 4	01	Slash ALU carter set				or Ø4,8x38mm (Rever)
5	01	Guide for connection pipe		19	05	Pan head self tapping screw Ø4,8x16mm
6	01	Connection pipe	2	20	08	M5 toothed washer
7	02	Protection	1	21	01	Black cap hole Ø8,8mm
8	01	Horizontal bar in anodized aluminium		22	02	Pan head self tapping screw Ø4,2x13mm
9	01	S3 hex key	* 4	26	01	Hole-covering base plate
10	01	Adhesive pictogram (green arrow)	* 4	27	01	Cover for hole-covering base plate – black
11, 11a	01	Standard nickel-plated half cylinder with three keys and	* 4	28	06	Self-drilling countersunk screw Ø4,2x16mm
		fastening screw	3	30	02	M3x8mm pan head screw
12	01	Installation plate in galvanized steel	3	31	01	Washer
13	01	Stainless steel cover plate	3	32	01	S4 hex key
14	01	S2 hex key	-	-	01	A034 hole-drilling template
15, 15a	01	9x9x40mm threaded square spindle with M5x20mm hex socket screw	-	-	01	Slash ALU BS panic bar set installation instruction
16	02	Self-tapping countersunk screw Ø5,5x38mm	Ê			c lock (24) and the respective strike box (counterstrike) (25)
17	02	M6 toothed washer		5	are delive	ered already mounted on the door as well as the subplate (23)!

Please note that article 4 of the MD of 03 November 2004 obliges the installer to write up, sign and provide the owner of the activity with a declaration of proper installation that makes explicit reference to the instructions supplied by the exit device manufacturer.

TOOLS REQUIRED Medium-sized Philips-head screwdriver or ele

Medium-sized Philips-head screwdriver or electric screwdriver, electric drill with \emptyset 2 and \emptyset 3mm drill bit for steel, fine-toothed hack-saw and hack-saw for aluminium.

IMPORTANT

- Installation should be carried out by qualified personnel only and in strict conformity with the instructions supplied.
- For a correct installation all supplied components must be used, including toothed washers.
- No variations are allowed, and only components indicated in the package contents may be used.
- Given its purpose, the Slash ALU BS panic bar should be mounted on the push-side of the door.
- Before proceeding with installation, check the package contents to ensure that no pieces are missing.
- Check if the door is equipped with the panic safe lock and the subplate (23).
- Check the type of external plate to apply and follow the specific instructions.
- Any different installation configuration from that illustrated on page 2/4 is not allowed.

INSTALLATION

- Insert the half cylinder (11) and fasten it temporarily with the screw (11a) then remove the key. If the hole of the subplate (23) does not match with the half cylinder, take away the lock (24) and turn the subplate upside down.
- For Rever door adjust the threaded square spindle (15) reducing its length for 5mm; be careful to cut the bevelled side.
- Insert the washer (31) over the square hole of the panic safe lock (24), from the pull-side of the door, as showed in drawing (33). Insert the M5x20mm screw (15a) over the washer (31) and screw it at the square spindle (15), using the S4 hex wrench (32). Make sure that washer and square spindle are correctly inserted over the square holes before tighten the screw (15a).
- Screw onto installation plate (12) the screws (30), just enough to insert the cover plate (13).
- Place the installation plate (12) on the pull side of the door and fix it with the screws (16) and their toothed washers (17), centering the respective holes of the installation plate (23).
- Use the template to drill the holes (29) with the Ø3mm drill bit, checking the level. If holes are already present, drill them again for the internal reinforcement.
- Insert the operating mechanism (1) of the panic bar over the square spindle (15), to the lock-side (push-side of the door), with the lift of the cam (1a) turned downwards. Fasten the mechanism starting with the two Ø4,8x16mm screws (19), then with the Ø4,8x50mm (Proget/Univer) or Ø4,8x38mm (Rever) screw (18), with their toothed washers (20).
- Fix the square spindle (15) at the operating mechanism (1), using the S2 hex wrench (14).
- In case of Univer and Rever doors, apply the hole-covering base plate (26) after having provisionally clipped on the carter (3) on the mechanism. Center it vertically above the carter and at a distance of 30mm from the edge of the leaf (see drawing). Fasten the hole-covering base plate provisionally with the two more external screws (28) by first drilling holes in the metal panel with the Ø2mm drill bit, then positioning the cover (27) to verify that it attaches correctly without interfering with the carter. If everything matches, complete fastening with the remaining screws (28) after removing the cover (27) and the carter (3).
- Fasten the mechanism (2) of the panic bar at hinged side, using the selftapping screws Ø4,8x16mm (19) and their toothed washers (20).
- Make a precise "L" measurement, cut the aluminium bar (8), and remove the burrs from the cut edge. Insert the guide (5) for the connection pipe in the center of the bar.
- Take out the mechanism (2) in order to insert the horizontal bar (8) in the operating mechanism (1); then insert also the connection pipe (6) until it passes through the block (6a).
- Insert the aluminium carters in the horizontal bar, first the one with the sticker (3), then the other one without (4). For Univer or Rever doors insert also the cover (27) between the two carters. Join the bar with the hinged side mechanism (2) inserting also the connection pipe (6) before re-fastening the mechanism at the door.
- Fasten provisionally the connection pipe (6) so that it not protrudes from the block, by screwing the two socket set screws (6c) of the hinged side mechanism (2) with the S3 hex key (9).
- Maintaining pulled the horizontal bar (8) block the connection pipe (6) by screwing lightly the two socket set screws (6b) of the operating mechanism (1). Then verify that the latch bolt retracts completely by pushing the end of the bar from hinged side. In this case screw the four socket set screws (6b and 6c) until they not protrude from the block. Otherwise loosen the socket set screws and repeat the operation, making sure that the connection pipe is kept under tension. Lastly cut off the protruding piece of the connection pipe.

- Insert the protections (7) in the designated guides of both mechanisms.
- Apply the carters (3 and 4) on the relative mechanisms while ensuring that the protections (7) remain in their position. Clip on the carters by pushing softly the horizontal bar; first the narrow side, then the wide side. Finally fix the carters fastening their socket set screw without forcing, using the S2 hex key (14).
- Finish fastening the half cylinder (11), insert the little cap hole (21) in the open hole of the panic safe lock (24).



- Push the Slash ALU BS panic bar at any point along the horizontal bar, checking to ensure that the latch bolt of the lock opens easily and fully. Use the same method to check the external side, using the key to retract the latch bolt. Test the door in both open and closed positions, and if necessary file down the plastic strike box (25) of one-leaved doors, or the panic safe lock for inactive leaf of two-leaved doors.

- Fasten the installation plate (12) using the self-tapping screws Ø4,2x13mm (22) and their toothed washers (20) after drilling holes in the metal panel with the Ø2mm drill bit. Insert the cover plate (13) onto installation plate (drw. 2). Using the S2 hex key (14), unscrew the screws (30) until the cover become fixed, avoiding any deformation (drw. 3).
- If present, the cover (27) has to be clipped on manually at the hole-covering base plate (26).
- Apply the pictogram (10) with the green arrow on the internal surface of the door, just above the horizontal bar.
- Lastly, use a dynamometer to measure the force required on the horizontal bar to release the lock. Record this force measurement in the present document.

USE

- Ensure that the door always opens easily.
- Avoid unnecessary strains on or handling onto external plate and exit bar.
- Protect the panic bar from external atmospheric agents.
- Ensure that nothing hinders the free movement of the horizontal bar.
- Do not paint the lock.
- Use the bar properly, do not pull it in the wrong direction.
- Do not leave the key in the lock.
 - Δ Make sure that any damaged or malfunctioning parts are replaced immediately.

MAINTENANCE

To ensure that door usage conforms with regulations, the following maintenance checks should be carried out at least once a month:

- Confirm that all of the installed components correspond with those listed in the present instructions and that no other latching devices than those originally installed have been added to the door.
- Inspect and activate the panic bar to verify that all of its components are in satisfactory operational condition.
- Use a dynamometer to confirm that the release force shows no significant differences from the forces recorded at the time of installation.

- Check whether all screws are fully tightened, tightening any that may have loosened.

- Check whether panic bar and key can be moved with minimal effort, and that the latch bolt of the lock retreats from the strike box without offering resistance. If the door has become difficult to open due to friction, the resistance can be reduced by filing the strike box down to the appropriate height.
- Activate the Slash ALU BS panic bar at both ends of the horizontal bar, checking to ensure full retraction of the latch bolt in both cases.
- Ensure that the latch bolt exits completely when the horizontal bar is released.
- Check the horizontal bar and replace it if any damage or deformities are detected.

 Check whether the inserts and strike boxes are blocked in any way and eliminate any obstructions.

- This product requires no special maintenance. Grease spray should be used to lubricate the internal workings of lock and panic bar on a regular basis the latter has a hole on its carter for this purpose.
- For normal cleaning use a cleaning agent designed specifically for chromepolished surfaces for the horizontal bar and another one designed specifically for stainless steel for the external cover plate.



 Any adjustments that become necessary must be carried out by qualified personnel using original NINZ replacement parts.

→ The owner of the activity is responsible for keeping the declaration of correct installation on file, conducting proper panic bar maintenance in accordance with all of the manufacturer's maintenance guidelines, keeping maintenance and check-up records and preserving the present document.

0425	the second s
	ICIM
	ICIM S.p.A Identification number: 0425 Piazza Don Enrico Mapelli, 75 - 20099 Sesto San Giovanni (MI) - ITALY
	Certificato di costanza delle prestazioni
	Certificate of constancy of performance
	Certificate N. Certificate No. 0425 - CPR - 001308
	In conformitia al Regulamente 305/2011 HEL del Performente Europeo e del Consiglio del 9 marzo 2011 Regulamento Produtti da Constructiona co CPRI), quante contrationa sa apricia al provide al constructiona del constructiona In compliance with Regulation 305/2011 HEL del de European Findmannet and of the Caucel of March 2011 (tiple Construction Productic Conference on Constructiona del contractiona del constructiona producti al constructiona Productic Conference on Conference on Conference al Constructiona del contractico producti contractico producti Constructiona del constructiona del Conference on Conference al Constructiona del contractico producti contractico producti Conference on Conference on Conference al Conference del Constructiona del Conste
	Dispositivi per le uscite antipanico azionati mediante una barra orizzontale per l'utilizzo sullo vie di esodo Panice aziti devices operated by a horizontal bar, for use on escape routes SLASH, SLASH AR, SLASH ALU, SLASH ALU, SLASH ALU, SLASH INOX, SLASH INOX AR
	MODELLI / MODELS Si veda allegato / See annex
	Caratteristiche: vedi Allegato / Characteristics: see Annex IMMESSO SUL MERCATO CON IL NOME O IL MARCHIO DI PLACED ON THE MARKET UNDER THE NAME OR TRADE MARK OF
	NINZ S.p.A.
	SEDE LEGALE HEAD OFFICE Corso Trento, 2/A - 38061 ALA (TN) - ITALY
	UNITA OPERATIVA PRODUCTION UNIT Corso Trento, 2/A - 38061 ALA (TN) - ITALY
	Deado certificato attactio de latar la disposicion (inguardanti la valvazione e la verifica dolla costanza della prestazione e le prestazione devenime nertralingazi z z della commi. Trias certificate attacta e la al provisione concenning file assessment and verification el constancy of performance and the performance actuatore el invesz z z of the anticiant
	EN 1125.2009 + EC1:2009 + CC1:2009 - Control of productions in biblints condotto dal productive e valuata al rec da jamente a tode y spane i red or faits controls are exploide and that the lactary production control conducted by the manufacture is associated and an another to the controls and the exploide and that the lactary production control conducted by the manufacture is associated and an another to the controls and the control of the control
	COSTANZA DELLA PRESTAZIONE DEL PRODOTTO DA COSTRUZIONE CONSTANCY OF PERFORMANCE OF THE CONSTRUCTION PRODUCT
	Ouncels conflictants & data emessas per la prima value. Il 3105/GOV e ha validità aino a dre la norma amenizzata, il prodotto da construcción: Interede AUP e la contrale di gradicazione nell'abilimento non sobicarno modifiche significative, o silvo a che tron venga socipisso o rifistica di organizzano di conflicazione notificanto contralizzazione anti anti anti anti anno andi atta silvo a che tron The conflicacione se fasti suardi o 3105/2003 ani vil immani vida si long an enfine the hamonized statastica. Ele construction product, the AUV2 medicalizza orbite manufacturing constitions in the plant are modified significantity, unless suspended or withdrawn by the conflict product conflictantic dori (SM S p.A.
	1 presente Centrificate é da ritement velida sola se accompagnate al relation Alegano 7 hio Centrificate à velid only with the relative Ameri
	ICIM S.p.Á. Direttore Tecnico
	EMISSIONE ISSUE 22/06/2017
	ICIM S.p.A Piazza Don Enrico Mapelli, 75 - 20099 Sesto San Giovanni (MI)

SPARE PARTS (see exploded drawing at page 2/4)				
position	code	description		
1, 2, 3, 4, 5, 7, 10	3102064.001	Slash ALU latch case		
1, 2	3105119.001	Slash assembly mechanism		
3, 4	3105173.001	Slash ALU carter set		
5, 7	3105130.001	Slash 2 protections + 1 plastic piece set		
6, 8	4204010	Anodized or painted aluminium bar set		
9, 12, 13, 14, 15, 15a, 16, 17, 18, 19, 20, 21, 22, 30, 31, 32	4211102.023	Slash BS set - stainless steel		
		Standard nickel-plated half cylinder		
11, 11a	4202103.001	40/10 for Proget/Univer thk. 60mm		
11, 11a	4202103.002	35/10 for Univer thickness 50mm		
11, 11a	4202103.003	30/10 for Rever		
23	3407013.001	Reinforcement plate		
24	3201001.016	Panic safe lock to push (AP 16/18)		
25	4212024.001	Set of 10 Proget strike box lock		
25	4212025.001	Set of 10 Univer thk60 strike box lock		
25	4212026.001	Set of 10 Univer thk50 strike box lock		
25	4212027.001	Set of 10 Rever strike box lock		
26, 27, 28	4204020.002	Slash hole cover + base plate + screws – finishing: black		

FOR REPLACEMENTS USE ORIGINAL NINZ REPLACEMENT PARTS FROM ITS FULL CERTIFIED SYSTEM ONLY!

PROPER DISASSEMBLY

When some parts or all of the panic bar needs to be replaced, the general guideline is to reverse the order of the original installation instructions. To replace the lock, all parts of the panic bar in the locking device zone must be disassembled, including the external plate. The lock itself (24) can be removed by unscrewing the two frontal screws.

This operation should be carried out with great care in order not to damage or move the components located inside lock housing!

MAINTENANCE date	RECORD description of the intervention	release force checked	operator

These instructions should be given to the owner of the activity, who must preserve them as a record of the maintenance operations carried out on the panic bar.

Certified components for SLASH ALU BS

Panic exit device:	model "SLASH ALU"
Panic safe lock:	item AP 16/18
Lock strike boxes:	items 2401006, 2401005, 2401015, 2401014
Operating element:	item BS inox